


# 2" Elima-Matic Bolted Metallic – ATEX

with Metallic Center Section

# E2

## Performance

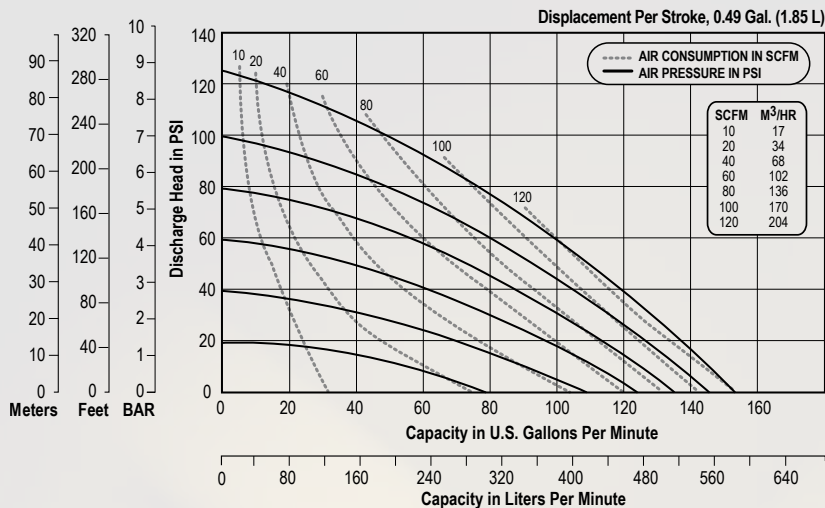

**NOTE:** Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

## Specifications

### Flow Rate

Adjustable to . . . . . 0-160 gpm (606 lpm)

### Port Size

Suction . . . . . 2" ANSI Flange (DIN Compatible)

Discharge . . . . . 2" ANSI Flange (DIN Compatible)

**Air Inlet** . . . . . 1/2" NPT

**Air Exhaust** . . . . . 1" NPT

### Suction Lift

Dry . . . . . 14' (4.3 m)

Wet . . . . . 30' (9.1 m)

### Max Solid Size (Diameter)

. . . . . 1/4" (6 mm)

**Max Noise Level** . . . . . 94 dB(A)

### Shipping Weights

Stainless . . . . . 114 lbs (51.7 kg)

## Dimensions

