


MOBILE HYDRAULIC POWER UNIT

MODEL HT66DKV

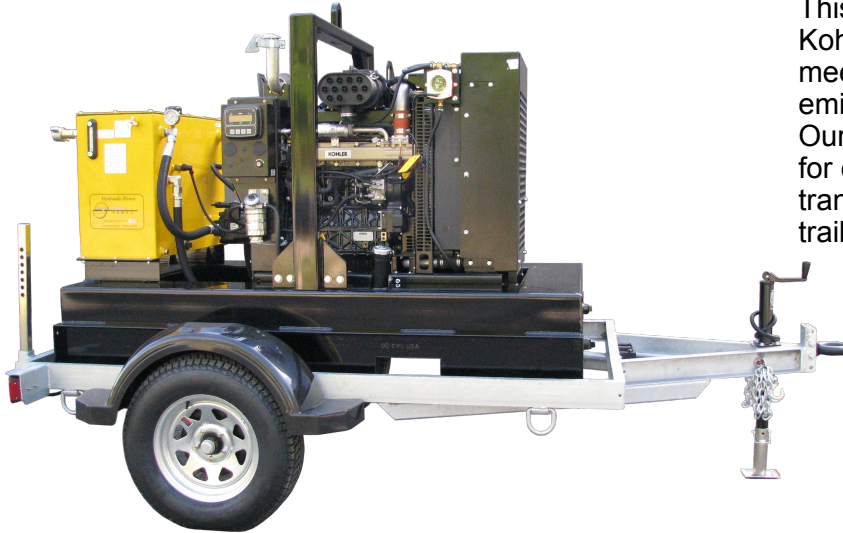

This power unit features a Kohler diesel engine that meets EPA Tier 4 Final emission standards. Our new frame design allows for easy handling and transport with a removable trailer option.

Unit shown with optional removable trailer


FEATURES

- Skid frame with built-in extended-run fuel tank, single point lifting bracket and fork slots
- EPA Tier 4 Final Clean Diesel Engine
- Electronic Engine Control Panel
- Variable Flow Pressure Compensated Hydraulic Pump
- Variable Speed Control
- Efficient Hydraulic Oil Cooler
- Spin-On Return Filter w/Indicator
- Tank Top Filler/ Strainer
- System Relief Valve
- Made in USA
- Liquid Filled Pressure Gauge
- Fluid Level/ Temperature Gauge

OPTIONS

- Removable Highway Trailer Meets D.O.T. requirements
- Multiple Hydraulic Circuits
- Other Flow and Pressure Combinations
- Float Switch Operation

Model HT66DKV Overall Dimensions

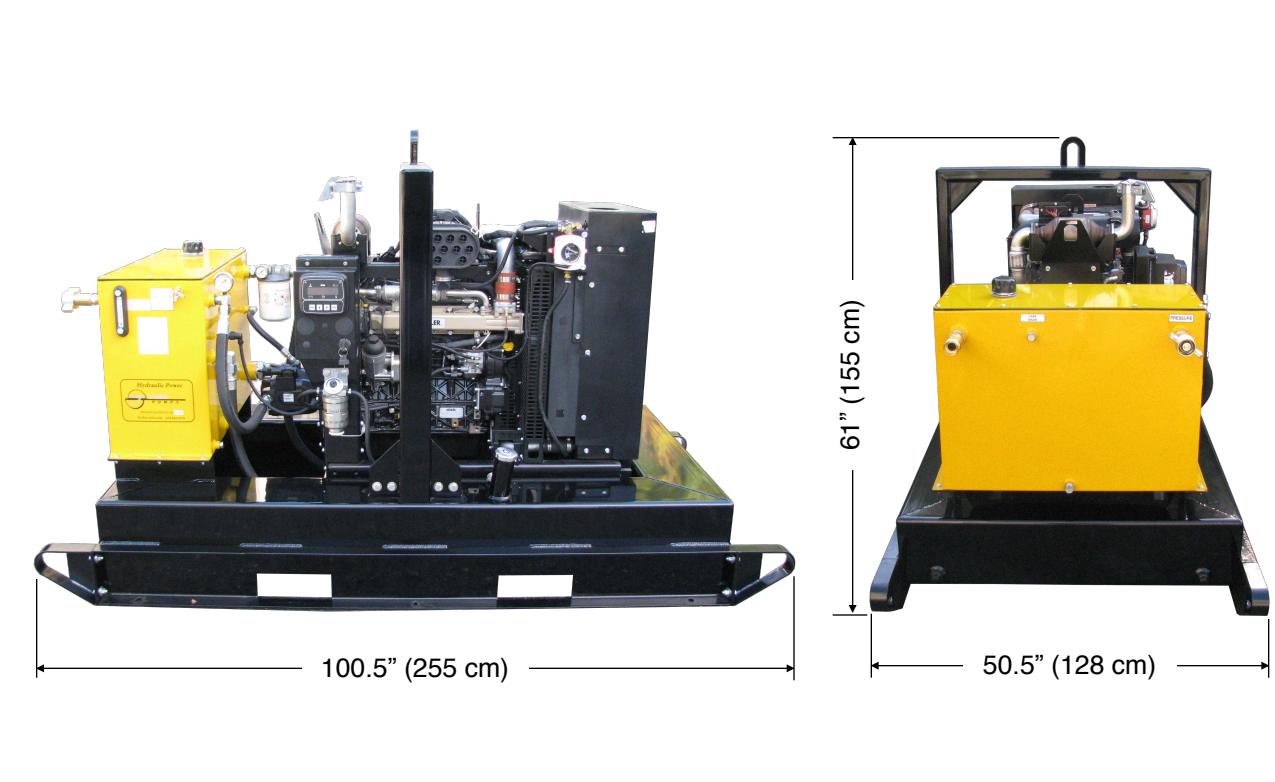

SPECIFICATIONS

ENGINE:..... Kohler KDI2504T Diesel (EPA Tier 4 Final)

HORSE POWER:..... 74 (55 Kw) @ 2200 RPM

HYDRAULIC OUTPUT*:..... Variable Max 28 GPM (106 LPM)

OPERATING PRESSURE*:..... Maximum 2900 PSI (197 Bar)

HOSE PORT SIZE:..... (Pressure and Return) 1" (25 mm)
 (Case Drain) 1/2" (13 mm)

HYDRAULIC OIL:..... SAE 10W or 20W Type AW
 also: Biodegradable Oil (Consult Factory)

OIL FILTRATION:..... 10 Micron (Standard)

OIL RESERVOIR CAPACITY:..... 50 U.S. Gallons (190 Liters)

FUEL TANK CAPACITY:..... 81 U.S. Gallons (307 Liters)

FUEL CONSUMPTION:..... Approx. 3 U.S. Gal/Hr (11.4 Liters/Hr)

DIMENSIONS (Skid):.. L 100.5" (255 cm), W 50.5" (128 cm), H 61" (155 cm)
(On Trailer): L 138.5" (352 cm), W 77" (196 cm), H 82" (208 cm)

WEIGHT (Skid):..... 2293 lbs. (1040 kg)
(On Trailer):..... 3426 lbs. (1554 kg)

* For Flows and Pressures Other Than Standard, Consult Factory

Since we are constantly working to improve our products, specifications are subject to change without notice.